


Plastic Traps
Condensate Products

M'ALPINE
Plumbing Products

SECTION

1

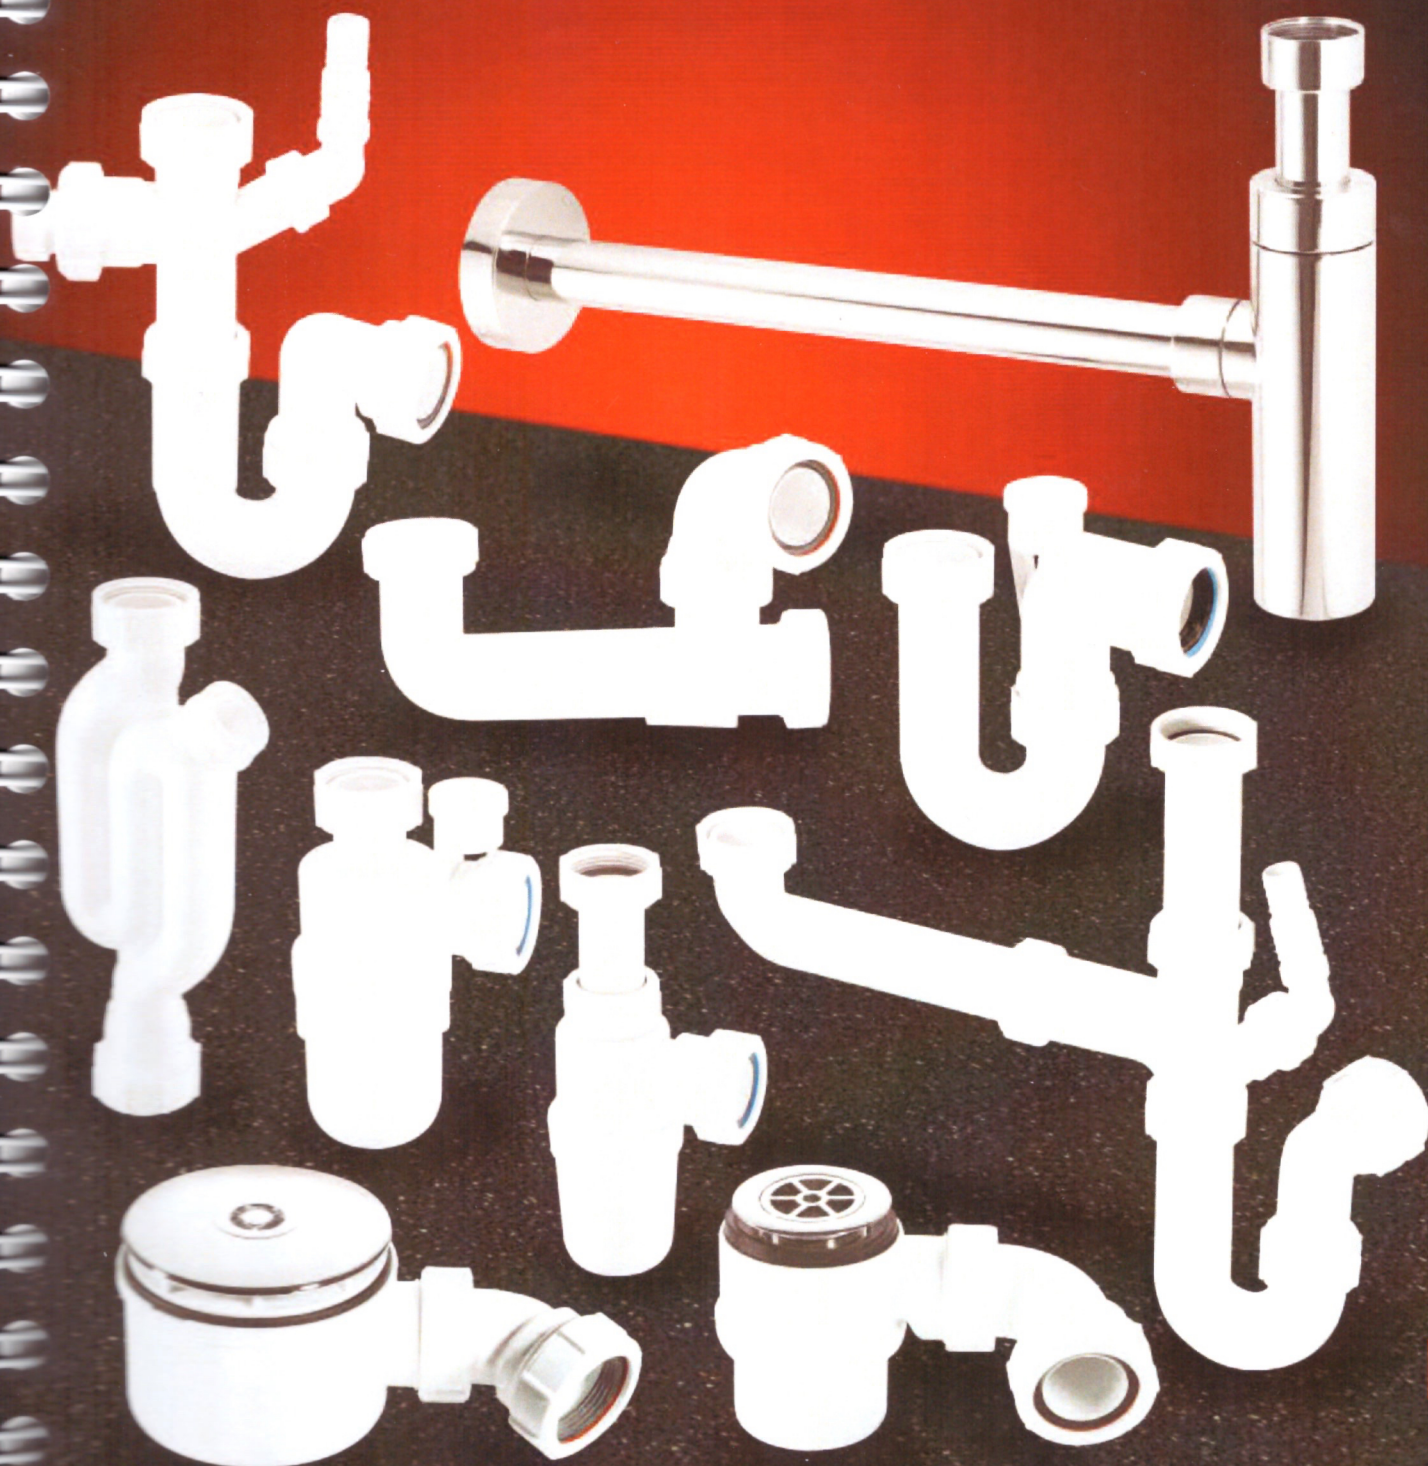

Plastic Traps and Condensate Products

Anti-Syphon Traps (Silenttraps)

General


- By drawing air through the valve, the Silenttrap neutralises syphonic pressure before it reaches the seal of the trap and therefore provides the equivalent of a ventilated system without the installation of costly and unsightly ventilation pipes
- The Silenttrap has been most rigorously tested and will not unseal, even under the most abnormal conditions
- The Silenttrap should continue to be effective irrespective of the distance between the appliance and the soil pipe

Operation


Whenever syphonic conditions develop, the negative pressure causes the valve to rise, allowing air to be drawn into the discharge pipe. The pressure is thereby neutralised before it can have any effect on the water seal within the trap. On cessation of the syphonic action, the valve closes, making the Silenttrap air and watertight

Advantages

- The major advantage of the Silenttrap over Resealing Traps is that because the air is drawn through the valve and not through the water seal, gurgling is eliminated and a much quieter discharge is ensured
- Eliminates the need for secondary ventilation
- Silenttrap valves are available on a wide range of Bottle, Tubular and Bath Traps
- Silenttraps allow for greater flexibility in plumbing design

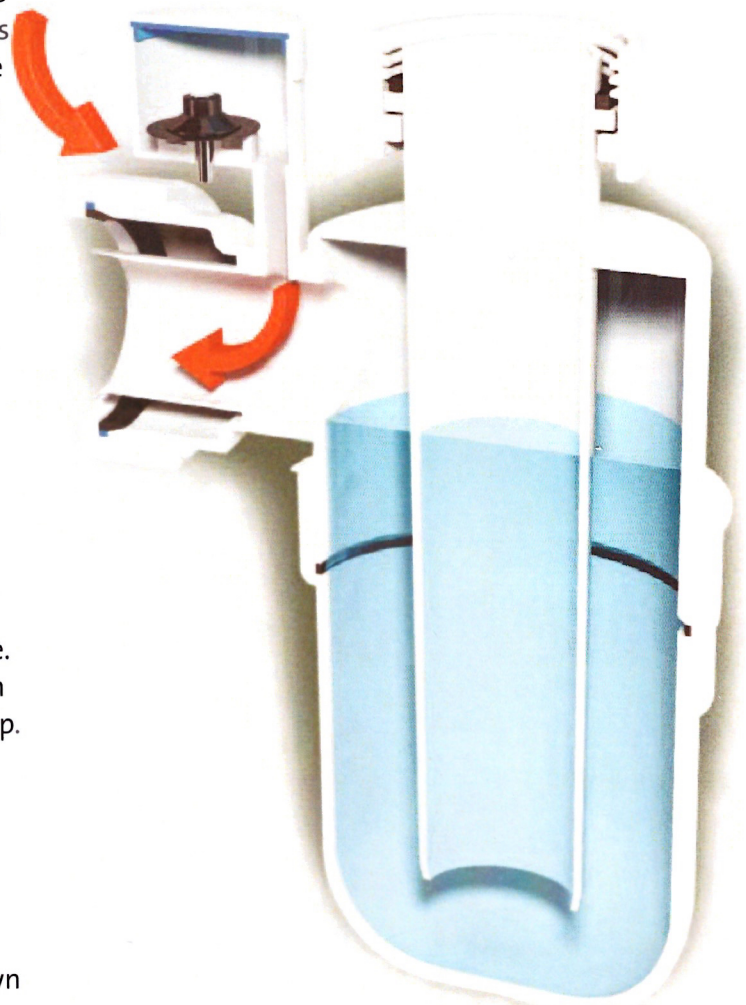

- The products below simply show that the Silenttrap attachment is available on Bottle, Tubular and Bath Traps. Popular Anti-Syphon Traps are shown throughout this catalogue. All traps marked* are available as Anti-Syphon (Silenttrap). Add suffix 'V' to code

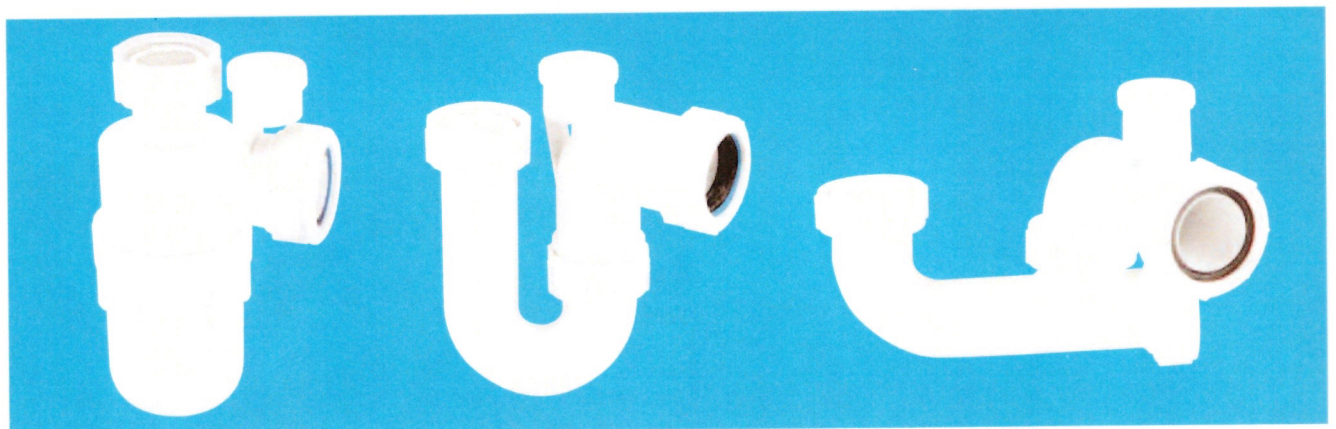

- A report of a special investigation by the Building Research Establishment on the performance of these traps under discharge and syphonic conditions is available on request

General


Resealing Bottle Traps are an alternative to Anti-Syphon Traps (Silenttraps) and may be used in similar circumstances

Operation

When the trap is subject to syphonic conditions the automatic hydraulic action allows air to be drawn through the inlet of the trap and through the by pass columns thus breaking the syphonic action. On cessation of syphonic conditions the remaining water falls back to reseal the trap. The Silenttrap ventilates by drawing air through a non-return valve whereas the Resealing Trap ventilates by drawing air through the inlet of the trap and through the water seal

Advantages

- The simple non-mechanical action ensures retention of adequate water seal even under extreme syphonic conditions
- Eliminates the need for secondary ventilation

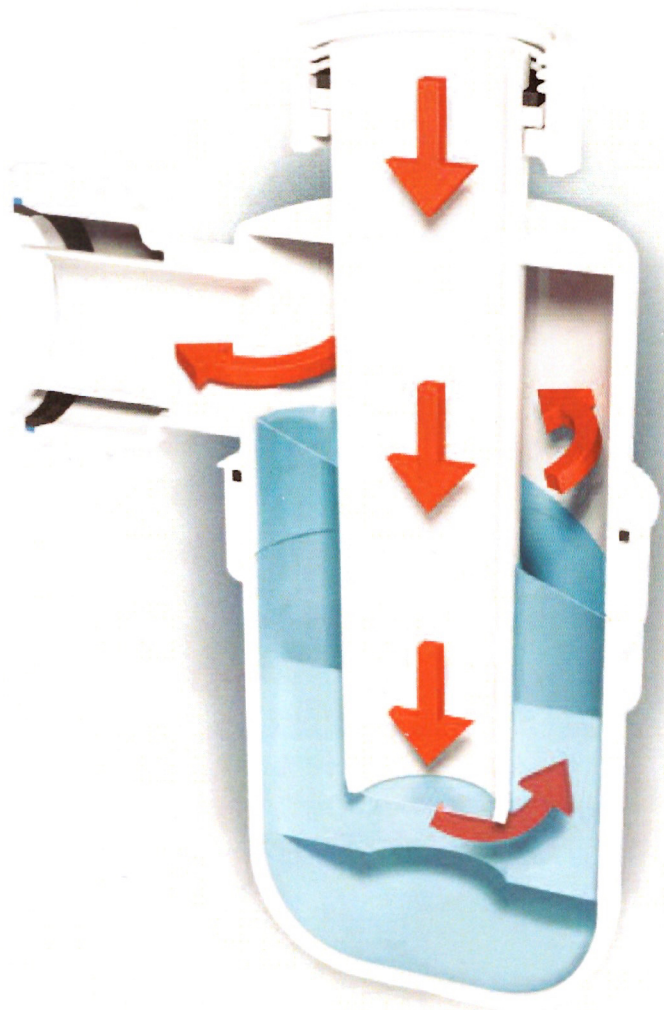

1 1/4" Code	1 1/2" Code
Standard	
A10R	C10R



Adjustable Inlet	
A10AR	C10AR



Adjustable Inlet Chrome Plated	
A10AR-CP	C10AR-CP



Resealing Shower Trap

Code	STW4-RB
------	----------------

- Full range of Resealing Shower Traps see pages 24-26

- Bends are available for converting 'P' traps to 'S' traps see page 6

Bottle Traps with 75mm Water Seal

Bottle Traps with 75mm Water Seal



1¼" Code	1½" Code
-------------	-------------

Standard

A10	C10
-----	-----



Anti-Syphon (Silentrap)

A10V	C10V
------	------



Resealing

A10R	C10R
------	------



Adjustable Inlet

A10A	C10A
------	------



Anti-Syphon (Silentrap)
Adjustable Inlet

A10AV	C10AV
-------	-------



Resealing
Adjustable Inlet

A10AR	C10AR
-------	-------



1¼" Code	1½" Code
-------------	-------------

Adjustable Inlet

AA10	-
------	---



Adjustable Inlet Basin
Trap with centre pin
waste

AA10W	-
-------	---




Bottle HandiTrap 75mm
water seal with 1¼" and
1½" inlets and outlets

Code	HANDITRAP-B
------	-------------



38mm Water Seal

E10	G10
-----	-----



Conversion Bend to
convert bottle 'P' trap to
'S' trap

S1M	T1M
-----	-----

Chrome Plated Bottle Trap




1¼" Code	1½" Code
-------------	-------------

Resealing Trap
Adjustable Inlet

A10AR-CP	C10AR-CP
----------	----------


Chrome Plated Basin Traps, Pipe and Wall Flange SECTION 1

- All kits except TA32UK-CB and TA32VUK-CB supplied with MS4-32SOLVENT fitting see pages 48 and 52
- For Chrome Plated Brass Waste Pipe and Fittings see page 52

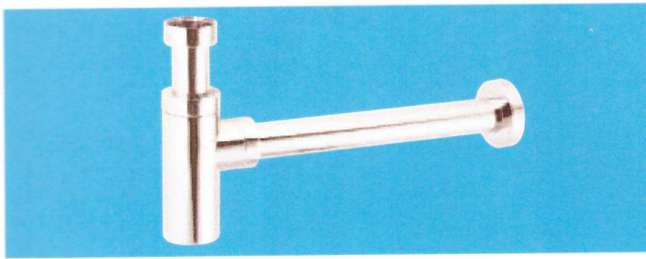


1 1/4" x 50mm Water Seal Brass Adjustable Inlet Cylindrical Bottle Trap with 12" length of 32mm OD CP brass waste pipe and wall flange

Code **CA32MINI-CB**

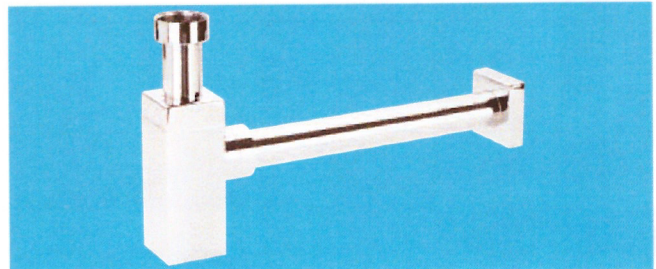


1 1/4" x 50mm Water Seal Brass Adjustable Inlet Square Bottle Trap with 12" length of 32mm OD CP brass waste pipe and wall flange

Code **CA32SQUK-CB**

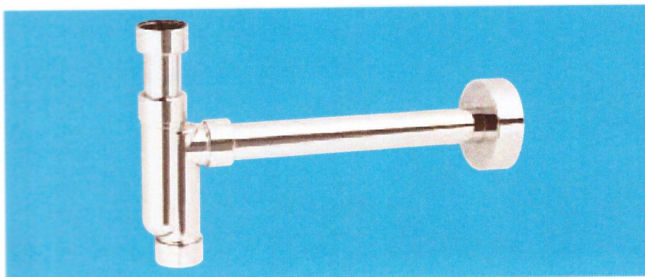


1 1/4" x 50mm Water Seal Plastic Adjustable Inlet Tubular Trap with 12" length of 32mm OD CP brass waste pipe and wall flange

Code **TA32UK-CB**

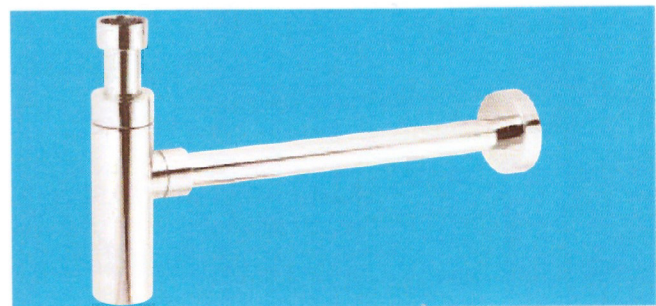


1 1/4" x 75mm Water Seal Brass Adjustable Inlet Cylindrical Bottle Trap with 16" length of 32mm OD CP brass waste pipe and wall flange

Code **CA32UK-CB**

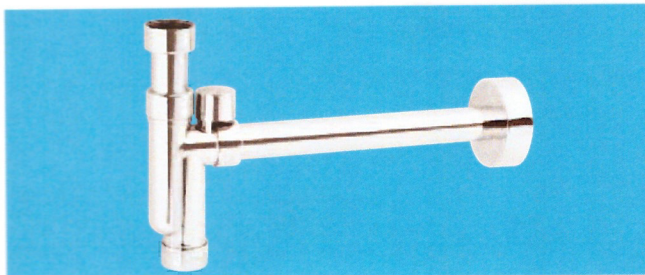

1 1/4" x 50mm Water Seal Plastic Adjustable Inlet Tubular Anti-Syphon Trap (Silentrap) with 12" length of 32mm OD CP brass waste pipe and wall flange

Code **TA32VUK-CB**

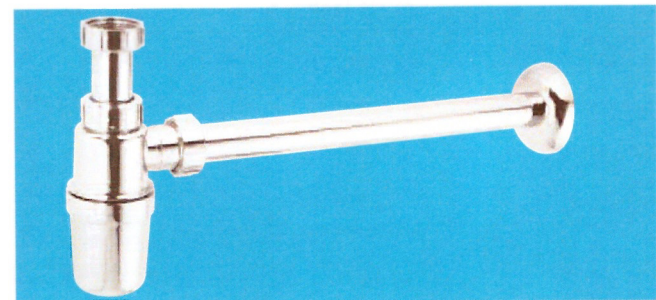

1 1/4" x 75mm Water Seal Brass Adjustable Inlet Bottle Trap with 16" length of 32mm OD CP brass waste pipe and wall flange

Code **A32UK-CP**

Chrome Plated Bottle Trap




1 1/4"	1 1/2"
Code	Code

Adjustable Inlet

CAA10

Adjustable Inlet to suit 32mm OD European size CP brass waste pipe

CE31A

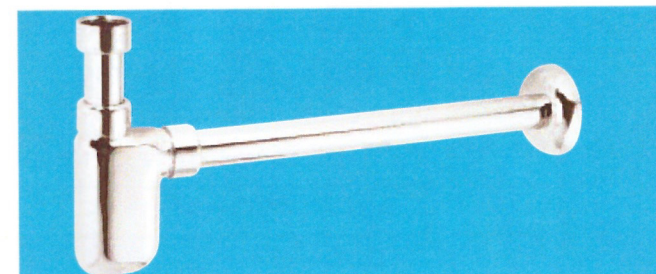

1 1/4" x 75mm Water Seal Brass Adjustable Inlet Bottle Trap with 16" length of 32mm OD CP brass waste pipe and wall flange

Code **A32UK-CB**

Tubular Traps with 75mm Water Seal

Tubular Traps with 75mm Water Seal



1¼"	1½"	2"
Code	Code	Code
Swivel 'P'		
SA10	SC10	SE10



Anti-Syphon (Silentrap)		
SA10V	SC10V	SE10V



Adjustable Inlet		
ASA10	ASC10	ASE10



Adjustable Inlet Anti-Syphon (Silentrap)		
ASA10V	ASC10V	ASE10V



Adjustable Inlet Basin Trap with centre pin waste		
ASA10W*	-	-



Adjustable Inlet Sink Trap with centre pin waste		
-	FST1WP*	-




1¼"	1½"	2"
Code	Code	Code
Low Inlet		
BT3*	-	-




50mm Water Seal		
BT4	-	-



Adjustable Inlet with connection for 19/23mm pipe		
ASA10-SP*	ASC10-SP*	-




Swivel 'S'		
SB10	SD10	SF10



All One		
SP10	TP10	ZP10



All One Anti-Syphon (Silentrap)		
SP10V	TP10V	-




All One Basin Trap with centre pin waste		
SP10W*	-	-



Tubular HandiTrap 75mm water seal with 1 1/4" and 1 1/2" inlets and outlets. *Note: Trap outlet can be swivelled from 'P' to 'S' position*

Code **HANDITRAP-T**



1 1/4" Code	1 1/2" Code	2" Code
-------------	-------------	---------

Running 'P'

SR10*	TR10*	SG10*
-------	-------	-------



Running 'S'


SS10	TS10	SH10
------	------	------



1 1/4" Code

Offset Basin Trap with adjustable inlet and cleaning eye

OBT1



Running suitable for most waste disposal units

-	TT10*	-
---	-------	---



Straight Through with one cleaning eye

1 1/4" Inlet x 1 1/4" outlet	X10	-	-
------------------------------	-----	---	---

Straight Through Anti-Syphon (Silentrap) with one cleaning eye

1 1/4" Inlet x 1 1/4" outlet	X10V	-	-
------------------------------	------	---	---

Straight Through with two cleaning eyes

1 1/4" Inlet x 1 1/4" outlet	X10A	-	-
------------------------------	------	---	---

1 1/4" Inlet x 1 1/2" outlet	Y10	-	-
------------------------------	-----	---	---



Running with 20mm water seal

-	TRSH10	-
---	--------	---



Adjustable Inlet with 19mm water seal

BT1	BT2	-
-----	-----	---

Domestic Appliance Traps 1½" x 75mm Water Seal

General

- Domestic Appliance Traps provide the facility to accept the discharge from a washing and/or dishwashing machine(s) and are suitable for new and existing installations
- In all cases a blank cap, plug or blank nozzle is provided with the trap. Should the domestic appliance not be connected at the time of installation, the trap will function as a normal sink trap whilst providing an easily accessible point for the future installation of any appliance(s)

Sink Traps with connection for the discharge from domestic appliance(s)



Code **WM1***



Code **WM2**




Code **WM2V**



Code **WM11***



Code **WM12***



Code **WM14***




Code **WM15***



Code **ASC10-CO***

Standpipe Trap and Fittings

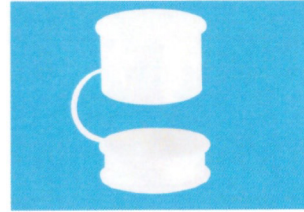

Standpipe Cap with retaining clip


Code **WM3-CAP**



Twin Connector for plumbing two domestic appliance discharge hoses into standpipe trap

- Multifit outlet to suit either 1½" or 40mm diameter standpipe
- 135° swivel nozzles for washing and/or dishwashing machine discharge hoses - supplied with blanking plugs
- Discharge hose(s) to be taken to the height stated by the appliance manufacturer(s)
- An air break, as specified by appliance manufacturers is incorporated within the connector

Code **V33WM**

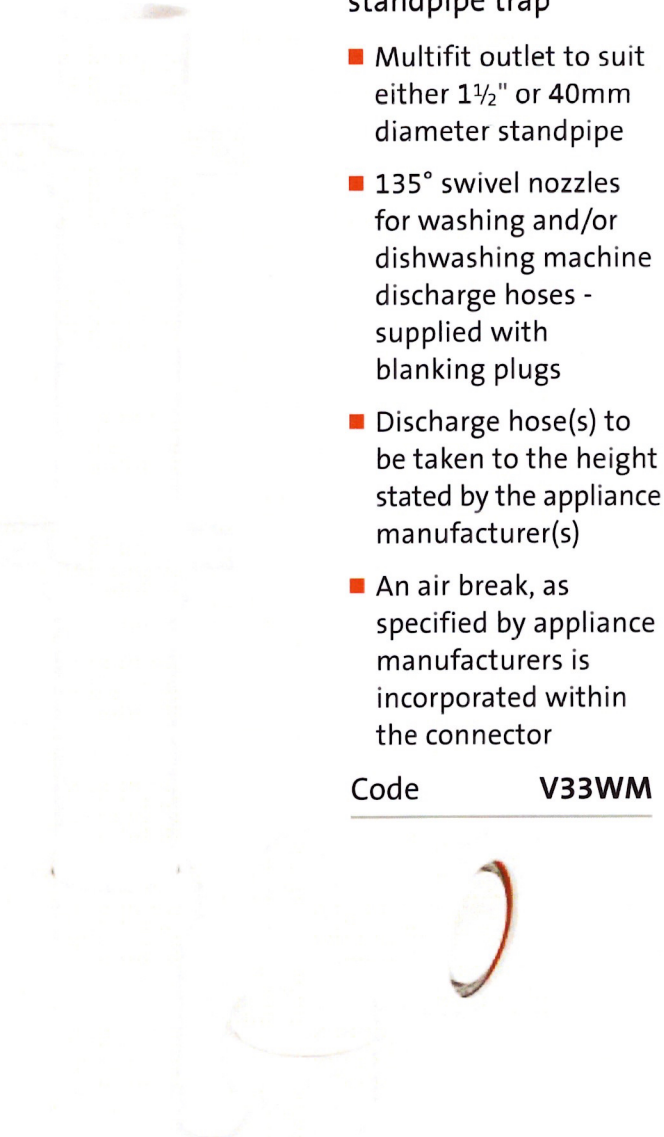


Standpipe Trap

Code **WM3***

Sink Trap with TeeVent

- The TeeVent system, which incorporates a non-return valve, provides an air break and enables the waste system to be sealed. This system has the advantage over a standpipe arrangement in that should a blockage occur, the non-return valve prevents flooding
- TeeVent fittings may be used with domestic appliance trap WM4
- All domestic appliance traps must be fitted in accordance with the fixing instruction leaflet included with each trap

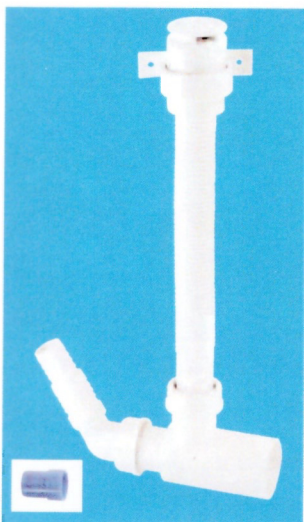

Code **TV1**



Code **TV2**

- **TV1** can be connected direct to the trap
- **TV2** can be extended away from the trap by inserting a length of 1½" waste pipe between Multifit connections of the TeeVent and the trap



Code **WM4***

Accessories



Straight Nozzle for connection to 1½" Multifit
Code **WMF3**




90° Nozzle for connection to 1½" Multifit
Code **WMF4**



135° Nozzle for connection to 1" BSP thread
Code **MA15**



Blanking Plug for traps and fittings
Code **228532**



Swept Tee BSP nut x BSP thread x nozzle for discharge hose of domestic appliance

1½" x 1½" x ¾" Code **V33L**

1¼" x 1¼" x ¾" Code **V34L**



Tee Piece BSP nut x BSP thread x 135° nozzle for discharge hose of domestic appliance


1½" x 1½" x ¾" Code **V33S**

- When installing domestic appliance traps, care should be taken to observe the instructions of the manufacturer of the appliance, particularly with regard to the height of the discharge hose and the incorporation of an air break or vent to atmosphere

Space Saver and Standard Plumbing Kits for Sinks. Plumbing


General

- Space Saver Kits are designed to allow full use of storage space below the sink bowl(s) and are suitable for use with almost all British and European sinks
- All kits have 1½" inlet connections and the provision for the discharge hose(s) of domestic appliance(s). Also supplied with an 1½" x 75mm water seal tubular swivel 'P' trap
- Each kit is boxed individually and supplied with an illustrative drawing

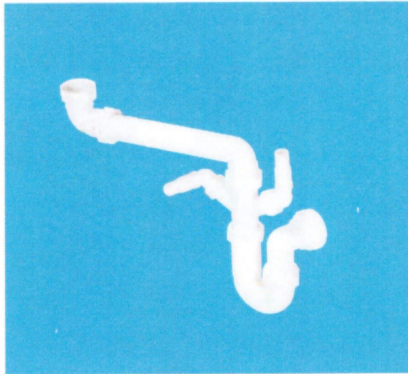


Single Bowl Kit

Code **SSK1**

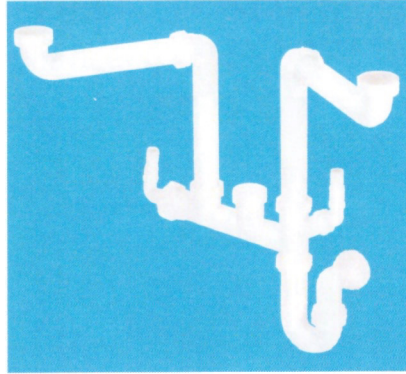


Double Bowl Kit

Code **SSK2**

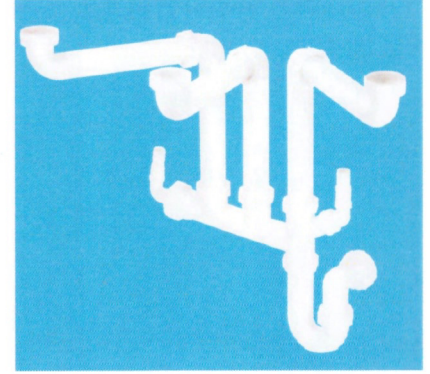

Three Bowl Kit

Code **SSK3**

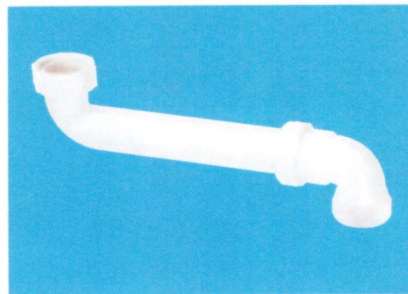

1½" Space Saver Trap Inlet

Code **SSINLET1**


1¾" Space Saver Trap Inlet

Code **SSINLET2**




Plumbing Kit for adjustable height basin or sink

Code **FLEXKIT1**

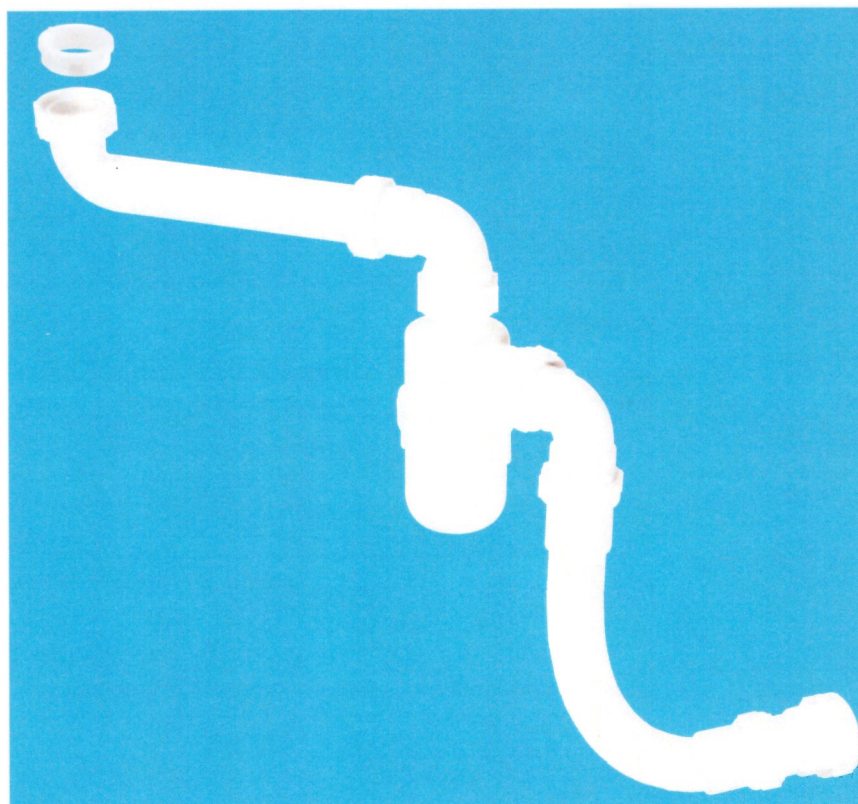


General

- Standard Kits have the provision for the discharge hose(s) of domestic appliance(s) and are suitable for use with almost all British and European sinks
- All kits have 1½" inlet connections and the provision for the discharge hose(s) of domestic appliance(s). Also supplied with an 1½" x 75mm water seal tubular swivel 'P' trap
- Each kit is supplied in a polythene bag complete with an illustrative drawing

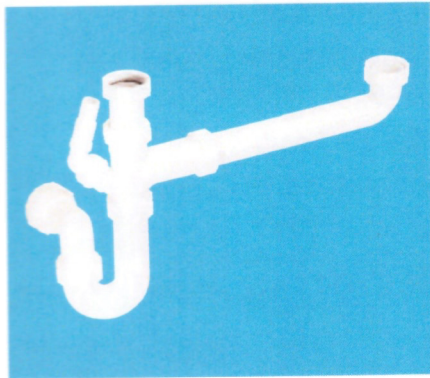


Bowl and a Half Kit

Code **SK1**

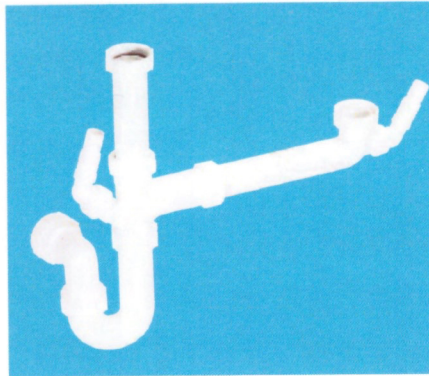


Bowl and a Half Kit

Code **SK1A**

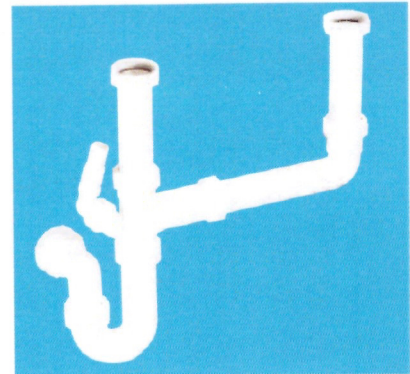

Double Bowl Kit

Code **SK2**

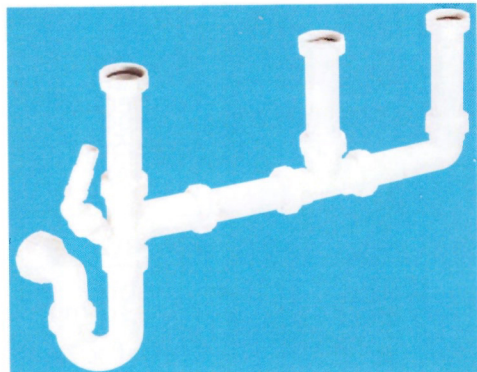

Three Bowl Kit

Code **SK3**



Blanking Plug(s)
included with all plumbing kits

Code **228532**

Code **SK1**

Condensate Products for Connecting Condensate Discharge

Basin and Sink Traps



1 1/4" x 75mm Water Seal Tubular Swivel Basin Trap with adjustable inlet and connection for 19/23mm pipe. Supplied with blanking cap

Code **ASA10-SP***



1 1/2" x 75mm Water Seal Tubular Swivel Sink Trap with adjustable inlet and connection for 19/23mm pipe. Supplied with blanking cap

Code **ASC10-SP***



1 1/2" x 75mm Water Seal Tubular Swivel Sink Trap with adjustable inlet, nozzle for discharge hose of domestic appliance and connection for 19/23mm pipe. Supplied with blanking cap

Code **ASC10-CO***



19/23mm Inlet and Outlet x 75mm Water Seal Offset Trap to receive discharge from condensing boiler. Supplied with support clip

Code **OBT1-CO**



34mm Open Inlet x 75mm Water Seal Offset Trap x 19/23mm Outlet to accept flexible pipe from condensing boiler. Supplied with support clip

Code **OBT2-CO**

Flexible Connector from Condensing Boiler to Rigid or Flexible Condensate Discharge Pipe

- Easy connection to boiler condensate discharge pipe
- Allows for disconnection in freezing conditions for discharge to be redirected into a receptacle
- Universal connections suitable for 19/23mm rigid pipe and 25mm flexible pipe



200mm Flexible Connector

Code **CONFLEX-200**

300mm Flexible Connector

Code **CONFLEX-300**

Flexible Condensate Pipe Kit

- For use in installation of condensing boilers
- Eliminates use of traditional rigid discharge pipe and fittings thereby allowing complete flexibility to discharge point
- Includes fittings to allow for easy connection to sanitary pipework
- Allows for disconnection in freezing conditions for discharge to be redirected into a receptacle
- Particularly useful where installation space is restricted



Flexible Condensate Pipe Kit - contents

- 1 x 3m length of 25mm flexible pipe
- 6 x 25mm pipe clips
- 2 x Straight connectors with universal connections suitable for 19/23mm rigid pipe and 25mm flexible pipe
- 1 x 1 1/2" plain tail ABS solvent weld reducer to 19/23mm rigid pipe and 25mm flexible pipe

Code

CONFLEX-KIT1

Soakaway - Container for use with limestone chippings. External use only



110mm x 300mm x 1¼" / 1½"
Pipe top and side Inlet Connections to receive discharge from condensing boiler. 19/23mm x 32mm solvent weld fitting provided to increase size of discharge pipe before it passes through the external wall
 Code **SOAK1GR**

Auxiliary Fittings



Pipe Clamp to suit 1¼" / 1½"
Pipe to BS EN 1451-1:2000 / BS EN 1329-1:2000 with universal connection for 19/23mm rigid pipe and 25mm flexible pipe
 Code (Grey) **CLAMP1GR**
 Code (White) **CLAMP1WH**



1½" x 1½" x 19/23mm Universal Slip Tee with universal connection for 19/23mm rigid pipe and 25mm flexible pipe
 Code **V1MX-CO**



In-line Vertical Non-Return Valve with inlet and outlet connection for 19/23mm pipe
 Code **CONVALVE**



Straight Connector with universal connections for 19/23mm rigid pipe and 25mm flexible pipe
 Code **R1M-CO**



50mm Tun Dish with 19/23mm pipe outlet
 Code **TUN-2**

Mechanical Soil Pipe Boss Connectors



Mechanical Soil Pipe Boss Connector 57mm hole saw size. Supplied with fixing tool
 4"/110mm x 1¼" pipe
 Code **BOSSCONN110-BL**
 4"/110mm x 1½" pipe
 Code **BOSSCONN110T-BL**
 4"/110mm x 1¼" pipe
 Code **BOSSCONN110-GR**
 4"/110mm x 1½" pipe
 Code **BOSSCONN110T-GR**



Two-Piece Cast Iron Soil Pipe Boss Connector to suit 22mm drill size. Supplied with fixing tool
 4"/100mm x 1¼" pipe
 Code **BOSS110CAST-BL**
 4"/100mm x 1½" pipe
 Code **BOSS110TCAST-BL**
 3½"/90mm x 1¼" pipe
 Code **BOSS90CAST-BL**
 3½"/90mm x 1½" pipe
 Code **BOSS90TCAST-BL**
 3"/82mm x 1¼" pipe
 Code **BOSS82CAST-BL**
 3"/82mm x 1½" pipe
 Code **BOSS82TCAST-BL**



Mechanical Soil and Rainwater Pipe Boss Connector for 1¼" pipe
 Code **BOSSCONN1.25BL**
 Code **BOSSCONN1.25GR**



Reducer in ABS 1¼" plain tail x 19/23mm universal connection
 Code **R16-BL**
 Code **R16-GR**




Mechanical Soil and Rainwater Pipe Boss Connector for 19/23mm pipe
 Code **BOSSCONN-22MM**

For full range of Boss Connectors see page 55

Bath Traps 75mm, 60mm, 50mm and 19mm Water Seal

Bath Traps without Overflows




1 1/2" x 75mm Water Seal

Code **L10**



1 1/2" x 75mm Water Seal Anti-Syphon (Silentrap)

Code **L10V**



1 1/2" x 60mm Water Seal (Extended Body)

Code **SM10E**




1 1/2" x 60mm Water Seal (Extended Body) Anti-Syphon (Silentrap)

Code **SM10EV**



1 1/2" x 50mm Water Seal

Code **SM10**




1 1/2" x 50mm Water Seal Anti-Syphon (Silentrap)

Code **SM10V**



1 1/2" x 50mm Water Seal


Code **SMP10**



1 1/2" x 50mm Water Seal Anti-Syphon (Silentrap)

Code **SMP10V**

■ For Bath Waste Outlet Fittings suitable for use with the above Traps see pages 83-85



1 1/4" x 19mm Water Seal


Code **P10**

1 1/2" x 19mm Water Seal

Code **Q10**


Bath Trap with Top Access

- 1 1/2" x 50mm water seal swivel bath trap
- CP brass waste with top access and spring-loaded mushroom plug
- Matching CP mushroom plug and CP overflow face
- Adjustable flexible overflow tube length 330mm - 580mm
- Overall height of trap only 112mm

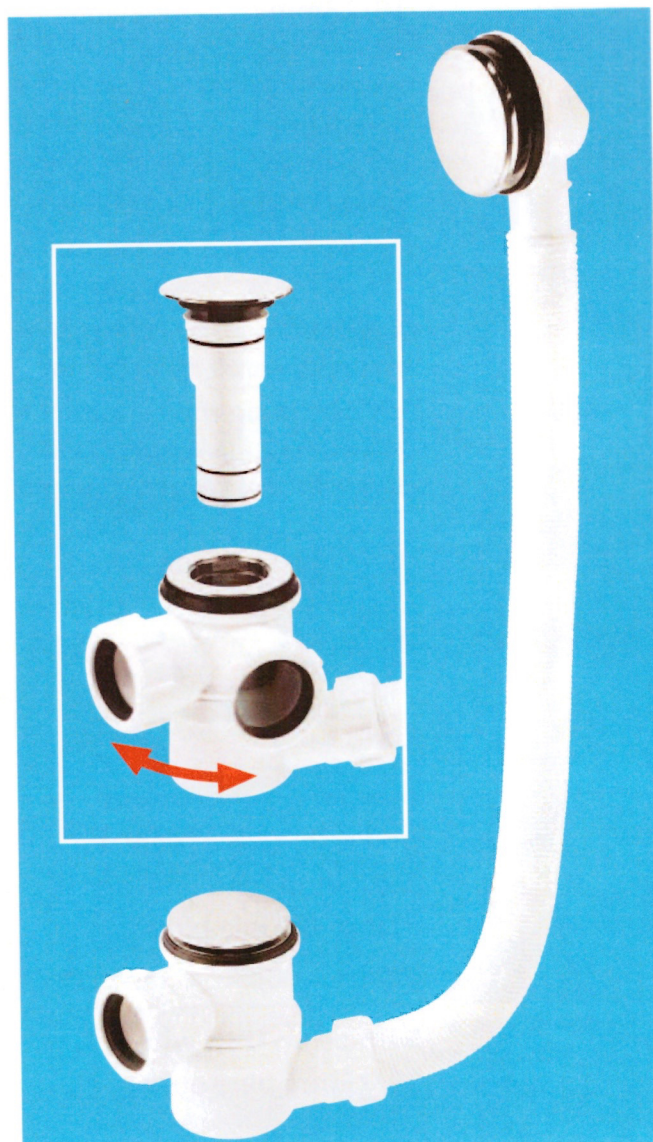


Code **HC2650UK**

Bath Traps with Overflows

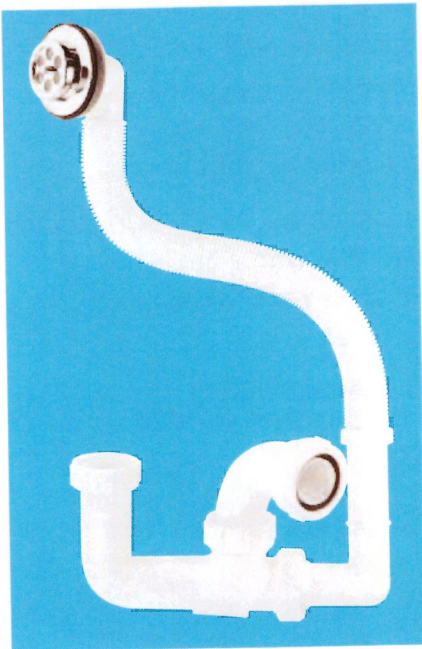

1 1/2" x 75mm Water Seal with flexible overflow tube and CP overflow grating

Code **FJ10**

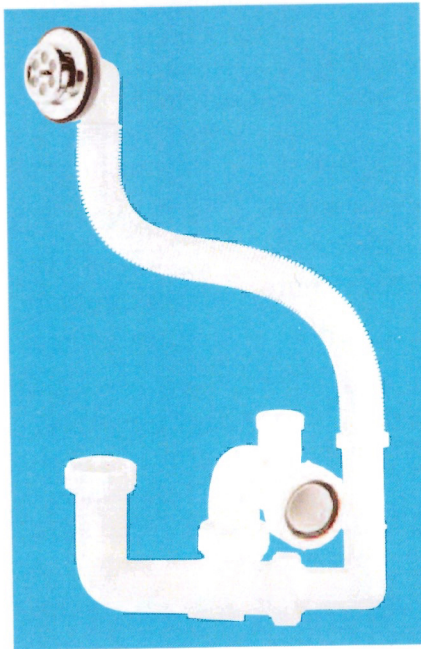


1 1/2" x 75mm Water Seal Anti-Syphon (Silentrap) with flexible overflow tube and CP overflow grating

Code **FJ10V**




1 1/2" x 75mm Water Seal with flexible overflow tube and CP overflow grating and 70mm flange centre pin waste outlet fitting

Code **FJ10WC***

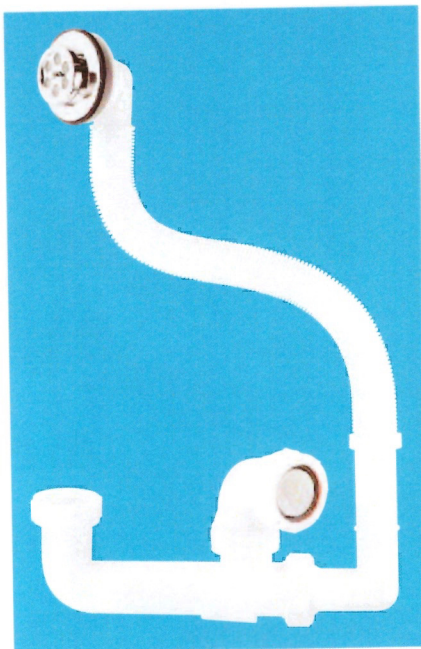


1 1/2" x 60mm Water Seal (Extended Body) with flexible overflow tube and CP overflow grating

Code **FSK10E***

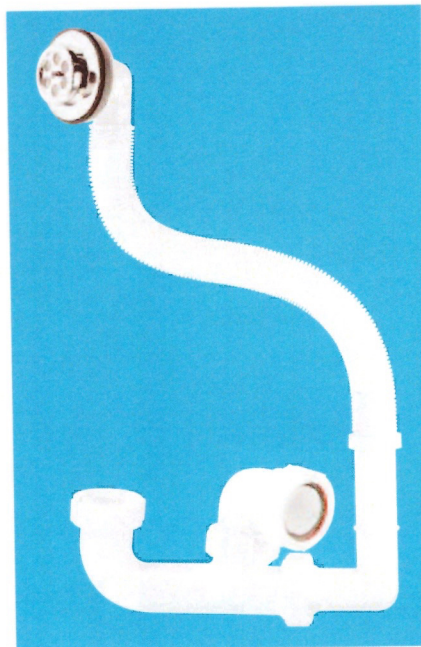

1 1/2" x 50mm Water Seal with flexible overflow tube and CP overflow grating

Code **FSK10**

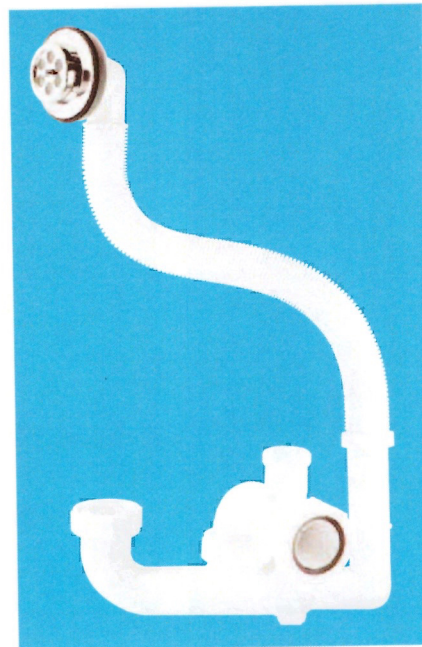

1 1/2" x 50mm Water Seal Anti-Syphon (Silentrap) with flexible overflow tube and CP overflow grating

Code **FSK10V**

Bath Traps 75mm, 60mm, 50mm and 19mm Water Seal

■ For Bath Waste Outlet Fittings suitable for use with the above traps see page 83

All traps marked* available as anti-syphon (Silentrap). Add suffix 'V' to code. See page 4 for technical details


Bath Fillers with Trap and Overflow

General


- Filler manufactured in cast brass
- Compact filler design 70mm diameter x 25mm deep suitable for curved baths
- Will fit overflow hole size 46mm to 65mm
- 0.5 bar pressure produces 33 litres per minute
1.0 bar pressure produces 44 litres per minute
2.0 bar pressure produces 57 litres per minute
- 650mm WRAS approved braided hose with 90° bend
- All traps 1½" x 50mm water seal with Multifit outlet
- Compression overflow connection to trap

- **HC2650UK-FIL** has a standard overflow length of 575mm but is available with a 1m length. Incorporates a swivel bath trap and CP brass waste with top access spring-loaded mushroom plug. Overall height 112mm
- **HCN3365UK** has a standard overflow length of 575mm but is available with a 1m length. Incorporates a CP brass waste and spring-loaded mushroom plug
- **HCN3165UK** has a standard cable and overflow length of 575mm but is available with a 1m cable and overflow. Incorporates CP brass waste and mushroom pop-up plug

Bath Fillers with Trap and Overflow

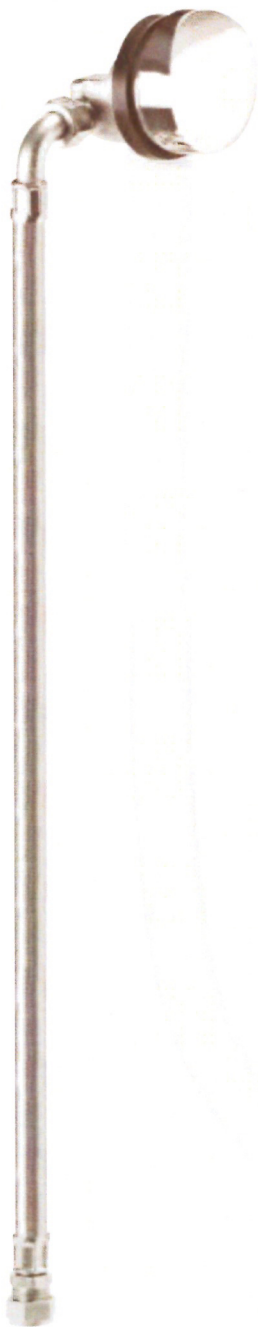

Code **HCN3365UK**
Code **HCN3365UK-1M**

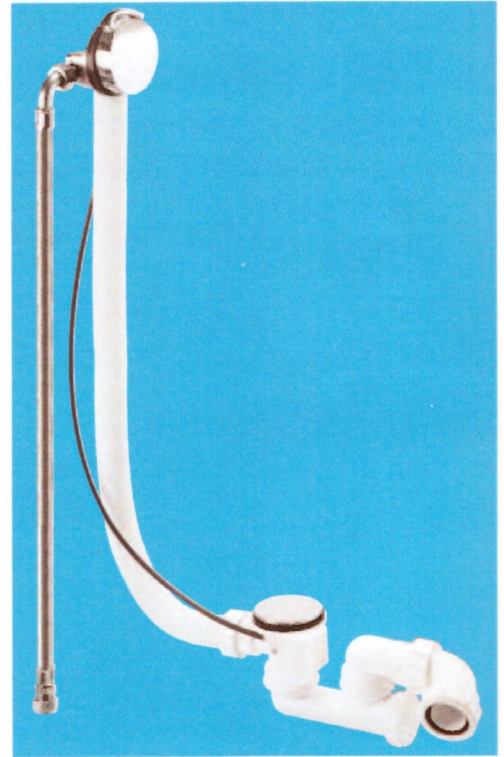


Code **HCN3165UK**
Code **HCN3165UK-1M**



Code **HC2650UK-FIL**
Code **HC2650UK-FIL-1M**



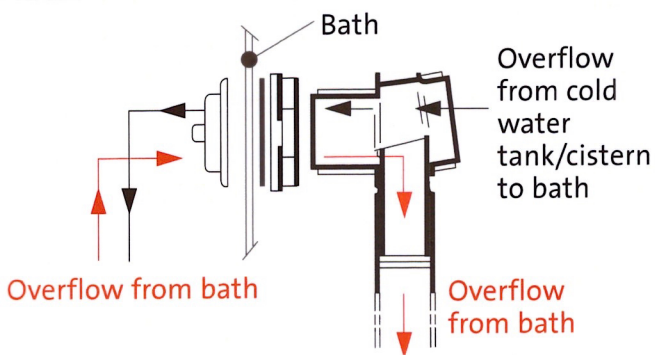

General

- Bath Wasteflow units enable the overflow and/or warning pipe from a cold water storage cistern and a WC flushing cistern (not fitted with an integral overflow) to be installed so that the discharge is directed into the bath via the bath overflow grating
- The construction of the Wasteflow is such that whilst acting as a conventional overflow for the bath, any overflow from a connected cistern is discharged through the overflow grating into the bath thereby providing a visible warning
- A feature of the Wasteflow design ensures that should the overflow grating be blocked, the overflow from the cistern is diverted to discharge directly into the bath trap and not

back along the overflow pipe thereby reducing the risk of flooding


- Wasteflow is also available with connection for condensate or condense drain

Advantages

- Wasteflow is available in various forms that allow greater flexibility for the discharge of cistern overflows, condensate and condense
- No unsightly external overflow pipes
- No damage to outside walls
- No risk of freezing
- No risk to other tenants or public


Installation

- Wasteflow is supplied with a choice of 50mm, 60mm or 75mm water seal trap
- Wasteflow is installed under the roll of the bath
- Wasteflow fittings shown on page 20 enable a range of connections that may be housed within the roll of the bath or if necessary extended into a duct space
- Overflow pipes connected to Wasteflow should have an adequate and continuous fall to ensure a natural gravity discharge

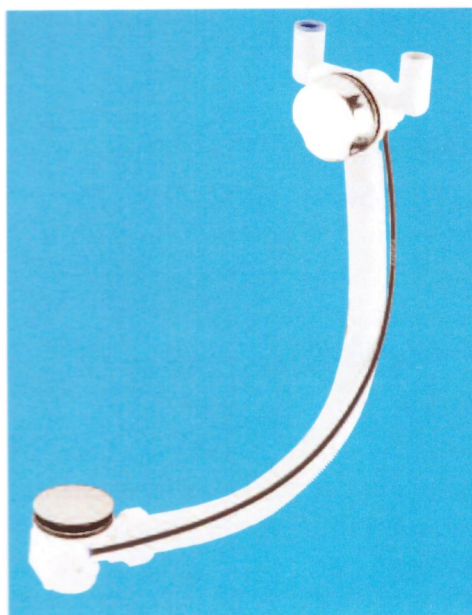

Wasteflow with pop-up waste and trap: CP brass control knob: CP stainless steel waste flange and plug


With L10 Trap	PUWF3-CP*
With SM10E Trap	PUWF2-CP*

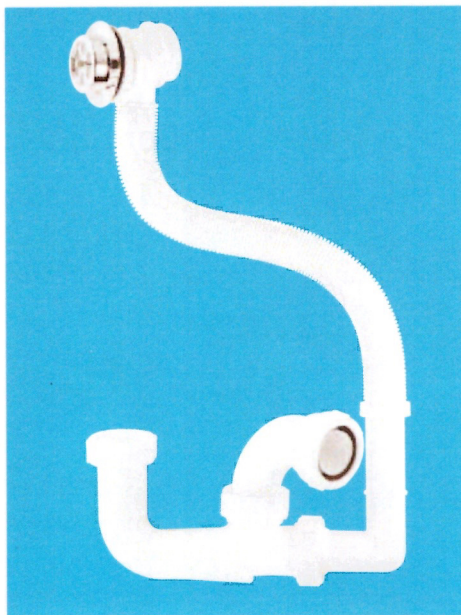

Wasteflow with trap

With FJ10 Trap	FJWF1*
With FSK10 Trap	FSKWF1*
Without Trap	WF1

- Bath Waste Outlet Fittings see page 83

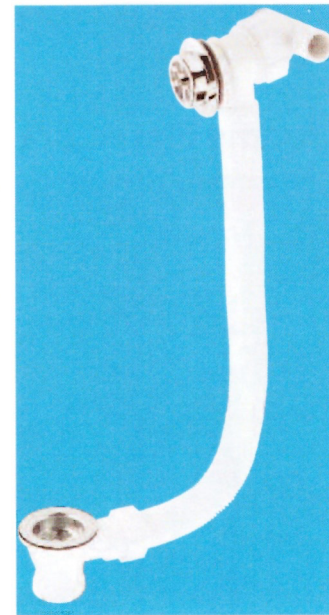

Wasteflow with 1½" waste outlet fitting, plug, chain and two way connector


Code	WF21
------	-------------

- Wasteflow Manifolds have a 1½" BSP male thread on the inlet and will normally require an additional fitting from the list on page 20

All traps marked* available as anti-syphon (Silentrap). Add suffix 'V' to code. See page 4 for technical details

Overflow Manifold (Wasteflow) Chrome Plated Bath Trap with Overflow

Wasteflow

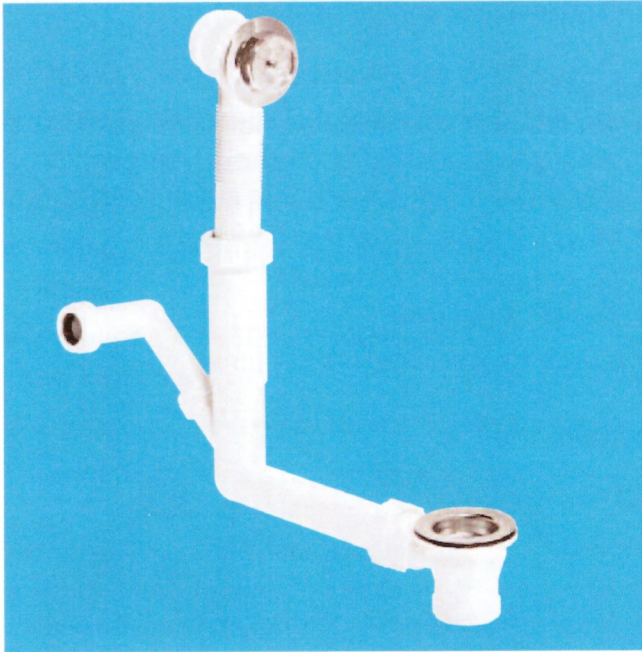

Wasteflow can be fitted with R11, R12 or R15 connector (order as required) for connection to overflow warning pipe. Side inlet connection for 19/23mm condensate or condense drain

Code **WF21-SP**

Wasteflow Fittings



Straight Connector 1½" loose nut x connection for 19/23mm pipe

Code **R11**



Four Way Connector 1½" loose nut x four connections for 19mm pipe, supplied with three plugs

Code **R12**




ABS Adaptor to convert 19mm connections on R12 and R15 fittings up to 23mm OD pipe

Code **R13**



¾" In-Line Non-Return Valve

Code **R14**



2 Way Connector 1½" loose nut x two connections for 19mm pipe, supplied with one plug

Code **R15**

■ See page 63 for WC Overflow Kits with Tun Dish

Chrome Plated Brass Bath Traps with Combined Waste and Overflow



1½" x 50mm Water Seal CP Brass Trap: 1½" CP brass combined waste and overflow with 70mm spring-loaded mushroom plug and matching overflow face

Code **BRASSTRAP-50-CP**

1½" x 25mm Water Seal CP Brass Trap: 1½" CP brass combined waste and overflow with 70mm spring-loaded mushroom plug and matching overflow face

Code **BRASSTRAP-25-CP**

Trap only

1½" x 50mm Water Seal CP Brass Trap x 1½" universal outlet

Code **BATHTRAP50-CPB**

1½" x 25mm Water Seal CP Brass Trap x 1½" universal outlet

Code **BATHTRAP25-CPB**

110mm x 50mm Water Seal Pushfit Traps, Urinal Bowl Syphonic Traps and Condensation Trap

110mm x 50mm Water Seal Pushfit Traps

Pushfit Traps are manufactured in high density polyethylene and the inlet and outlet sealing rings from a proven synthetic rubber compound. Pushfit traps will suit WC squatting pans, slop hoppers or similar appliances with 90-114mm plain end outlet and will connect to 110mm pipe



Code

WCTRAP4P



Code

WCTRAP4S


Urinal Bowl Syphonic Traps

Syphonic Traps have inlets to suit continental style syphonic urinal bowl to create a 75mm water seal trap. Outlet to suit 2" BS EN 1329-1:2000 solvent weld pipe



Syphonic 'P' Trap

Code **HCUP50UK**

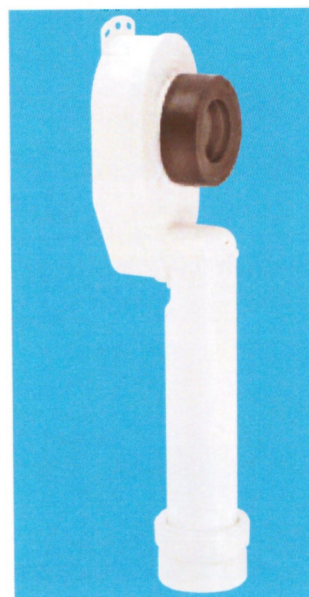

Syphonic 'S' Trap

Code **HCUS50UK**

Condensation Trap

Condensation Trap has been designed as a straight socket connector for 110mm and 125mm pipe (commonly used as ducting for basic air extraction systems) and provides an internal trap/diverter which will collect condensation forming on the internal surface of the extract pipework. It allows for the connection of a 19/23mm pipe, which can be installed to drain off the condensation to a convenient position



110mm pipe

Code **CONTRAP1**

125mm pipe

Code **CONTRAP2**

90mm Shower Traps with 50mm Water Seal

90mm Shower Traps with 50mm Water Seal and removable 113mm Flange to


CP Plastic Flange

CP Brass Flange


CP Brass Flange

90mm x 50mm Water Seal with 1½" Multifit Outlet

Overall height 70mm

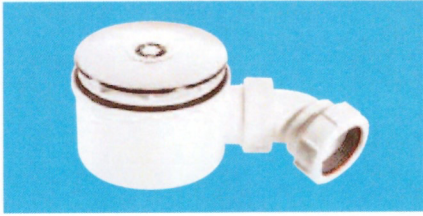

ST90CP10-70

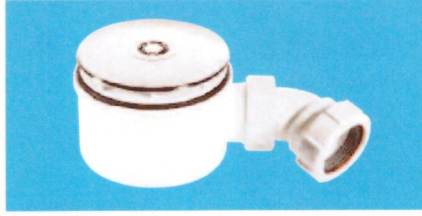

ST90CB10-70




ST90CPB-P-70

90mm x 50mm Water Seal with 1½" Multifit Outlet


Overall height 82mm



ST90CP10

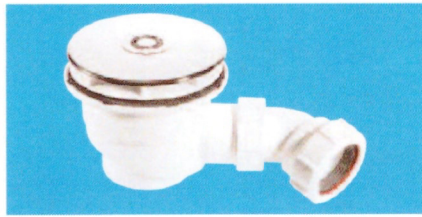

ST90CB10

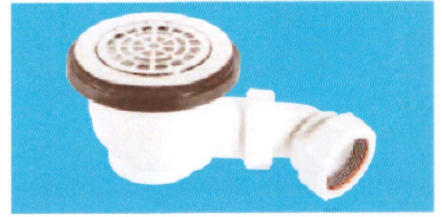

ST90CPB-P

90mm x 50mm Water Seal with 1½" Multifit Outlet


Overall height 85mm



ST90CP10-HP2




ST90CB10-HP2

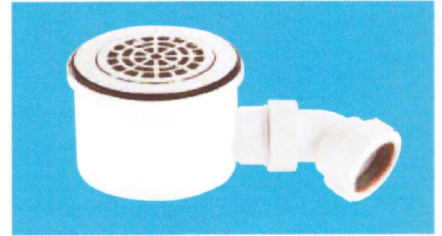


ST90CPB-P-HP2

90mm x 50mm Water Seal with 2" Multifit Outlet


High-flow high-performance trap. Overall height 85mm

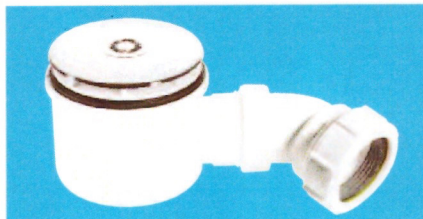

ST90CP10-HP

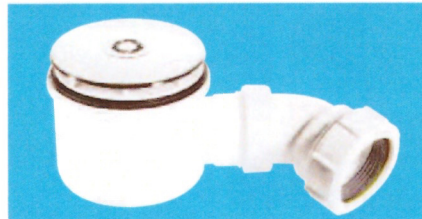


ST90CB10-HP

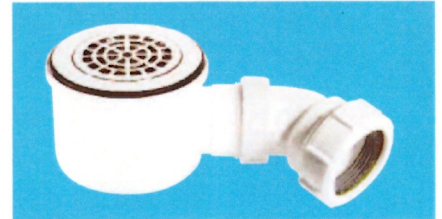

ST90CPB-P-HP

90mm x 50mm Water Seal with 2" Universal Vertical Outlet

Overall height 108mm

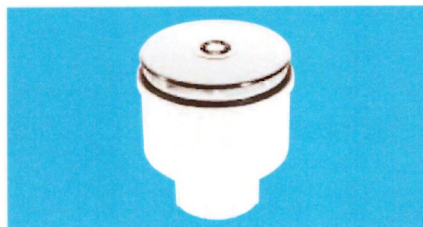

ST90CP10-V



ST90CB10-V



ST90CPB-P-V

90mm Shower Traps with 50mm Water Seal

facilitate easy cleaning

CP Brass Flange

White Plastic Flange

90mm x 50mm Water Seal with 1½" Multifit Outlet

Overall height 70mm



ST90CPB-S-70



ST90WH10-70

90mm x 50mm Water Seal with 1½" Multifit Outlet

Overall height 82mm



ST90CPB-S




ST90WH10

90mm x 50mm Water Seal with 1½" Multifit Outlet

Overall height 85mm



ST90CPB-S-HP2

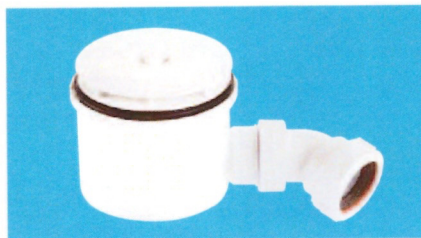


ST90WH10-HP2

90mm x 50mm Water Seal with 2" Multifit Outlet

High-flow high-performance trap. Overall height 85mm




ST90CPB-S-HP

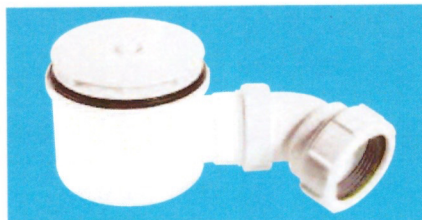

ST90WH10-HP

90mm x 50mm Water Seal with 2" Universal Vertical Outlet

Overall height 108mm

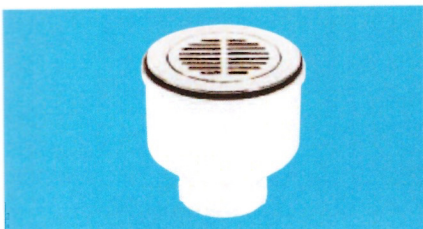

ST90CPB-S-V



ST90WH10-V

■ For flow rates see page 101

Do not pour drain cleaner down these products


1½" Shower Traps with Top Access

Traps with Standard Waste and Flange

- Waste grid and dip tube removable from top to facilitate easy cleaning
- 1½" Multifit outlet
- 70mm or 85mm standard waste and flange - white plastic, CP plastic or CP brass
- Gold plated wastes and grids only supplied as separate items - see page 27

1½" Shower Traps with Top Access

Code STW4-R

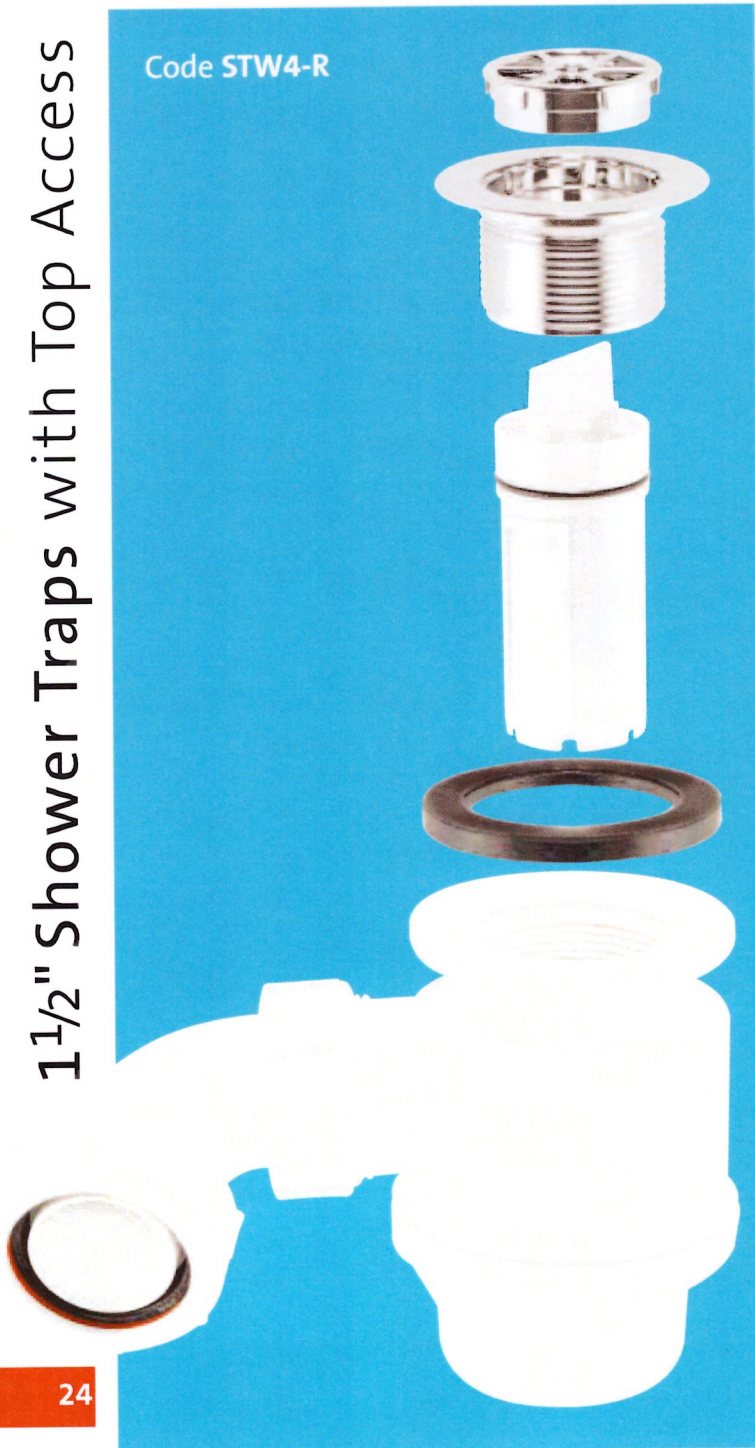

70mm White Plastic Flange

85mm White Plastic Flange

19mm Water Seal Trap

Overall height 95mm



STW1-R



STW5-R

50mm Water Seal Trap

Overall height 95mm




STW2-95



STW6-95

50mm Water Seal Resealing Trap

Overall height 118mm

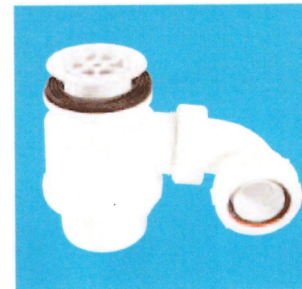

STW2-R



STW6-R

80mm Water Seal Resealing Trap

Overall height 154mm



STW9-R



STW11-R

Do not pour drain cleaner down these products

■ For flow rates see page 101

70mm CP
Plastic Flange

85mm CP
Plastic Flange

70mm CP
Brass Flange

85mm CP
Brass Flange

19mm Water Seal Trap
Overall height 95mm



STW3-R



STW7-R



STW3-RB



STW7-RB

50mm Water Seal Trap
Overall height 95mm



STW4-95



STW8-95



STW4B-95



STW8B-95

50mm Water Seal Resealing Trap
Overall height 118mm



STW4-R



STW8-R



STW4-RB



STW8-RB

80mm Water Seal Resealing Trap
Overall height 154mm



STW10-R



STW12-R



STW10-RB



STW12-RB

1½" Shower Traps with Top Access

Do not pour drain cleaner down these products

1½" Shower Traps with Top Access

Traps with Waste and Mushroom Flange

- Mushroom flange and dip tube removable from top to facilitate easy cleaning
- 1½" Multifit outlet
- 70mm or 85mm mushroom flange available in white plastic or CP stainless steel complete with standard locking nut

70mm White Plastic Mushroom Flange

85mm White Plastic Mushroom Flange


70mm CP Stainless Steel Mushroom Flange

85mm CP Stainless Steel Mushroom Flange

19mm Water Seal Trap Overall height 95mm



STW1-M

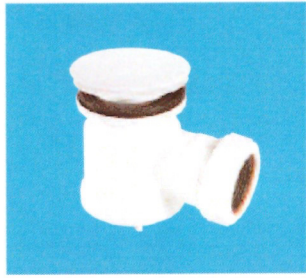

STW5-M



STW3-M



STW7-M

50mm Water Seal Trap Overall height 95mm



STW2M-95



STW6M-95



STW4M-95



STW8M-95

50mm Water Seal Resealing Trap Overall height 118mm



STW2-M



STW6-M



STW4-M



STW8-M

80mm Water Seal Resealing Trap Overall height 154mm



STW9-M



STW11-M



STW10-M



STW12-M

1½" Shower Traps with Top Access

70mm Shower Trap and Shower Trap Accessories SECTION 1



70mm x 25mm Water Seal Trap with Top Access: 85mm CP Stainless Steel Mushroom Flange with 1½" BS EN 1329-1:2000 solvent weld outlet. Overall height 50mm

Code **ST70SS85**

■ Only suitable for shower trays with a 70mm waste outlet

Standard Waste with grid to suit tray with maximum thickness of 22mm



White Plastic
STW70WH
STW85WH



CP Plastic
STW70CP
STW85CP



CP Brass
STW70CPB
STW85CPB



GP Plastic
STW70GP
STW85GP

Long Waste with grid to suit tray with maximum thickness of 29mm



White Plastic
STW70WHL
STW85WHL



CP Plastic
STW70CPL
STW85CPL

Grid only



White Plastic
STWGR-WH



CP Plastic
STWGR-CP



GP Plastic
STWGR-GP

Standard Locking Nut to suit tray with maximum thickness of 22mm



STW70LN
STW85LN

Mushroom Flange



White Plastic



CP Stainless Steel

Long Locking Nut to suit tray with maximum thickness of 29mm

STW70WHM
STW85WHM

STW70SSM
STW85SSM



STW70LNL
STW85LNL

70mm Shower Trap and Shower Trap Accessories

Trap Washers, Bath and Shower Trap Accessories

Trap Washers, Bath and Shower Trap Accessories



1¼" Code	1½" Code	2" Code
-------------	-------------	------------


Trap Inlet

RW1	RW2	RW3
------------	------------	------------




Multifit Rubber Olive

RWM1	RWM2	RWM3
-------------	-------------	-------------




Multifit Plastic Friction Washer

Blue	Red	Green
PWM1	PWM2	PWM3




Rubber Washer

For A10 CUP	ARW10
For C10 CUP	CRW10
For E10 CUP	RW3




Blanking Plug, Nut and Washer for L10, SM10, SM10E bath traps

Code	L10PLUG
Code	SM10PLUG
Code	SM10EPLUG



Rubber Seal to suit ST90 dip tube

P-RW-STW90



Rubber 'O' Ring Seal to suit STW dip tube

P-OR-SHOWERTRP



Dip Tube to suit STW trap
19mm water seal


STW19-TUBE

50mm water seal

STW50-TUBE


80mm water seal

STW80-TUBE



113mm CP Plastic Flange to suit ST90 Trap. Supplied complete with dip tube

ST90CPTOP+TUBE



Long Waste for ST90CP10, ST90CB10 and ST90WH10 traps. To suit tray with maximum thickness of 25mm

ST90W/BODY-L